



## PD5 Series

DMR handheld radios

The PD5 series from Hytera convinces with its compact design, scope of functions and high cost efficiency. With the support of digital and analog mobile radio, the PD5 series is your perfect companion for entering the professional digital mobile radio.



# Radios

## PD5 Series

PD505

PD565

DMR handheld radios



### Highlights

#### Compact, lightweight and easy to operate

The radios of the PD5 series are particularly ergonomic and easy to operate. With a weight of only 260 g (PD505) or 280 g (PD565), the PD5 series offers a high level of mobility comfort.

#### Cost-efficient with superlative voice quality

With the combined application of the narrow-band codec and digital technologies for error correction, the PD5 series ensures a superlative voice quality even in loud environments or in peripheral areas of the radio coverage.

#### Long battery service life

The lithium-ion battery (1500 mAh) included in the scope of delivery achieves an operating time of at least 16 hours (duty cycle 5-5-90). With the optionally available 2000-mAh battery, it will even be 20 hours.

#### Support of analog and digital mobile radio

The PD5 series was developed in compliance with the ETSI mobile radio standard Digital Mobile Radio (DMR). The handheld radios support the conventional DMR mode and can also be operated in manual mode. On top of that, the radios support Hytera XPT radio systems. That makes the terminals of the PD5 series the ideal companion for the move to digital mobile radio.

#### Pseudo trunked radio

With the patented pseudo trunked radio, the terminals dynamically utilize the timeslots of a frequency. As a result, the radios can utilize both timeslots in DMO and RMO mode in the conventional DMR operation. This guarantees an efficient frequency utilization.

#### Additional Functions (selection)

- One-touch functions with which preprogrammed text messages, voice calls and supplementary functions can be called up quickly
- Support of several expanded analog signal modes, including HDC1200, 2-tone and 5-tone, for an improved integration in existing analog radio fleets
- Hytera basic encryption (40 bit) in digital operation
- Scrambler function in analog operation
- Leasing function
- Versatile voice calls: Individual call, group call, broadcast call, data call, emergency call
- DMRA data service
- Wireless radio activation/deactivation (enable/disable), Priority interrupt and remote monitor function (optional)



Battery service life of 16 hours (1500-mAh battery) and 20 hours (2000-mAh battery) in digital operation


Ergonomic and lightweight chassis




High cost efficiency

Corresponds to US Military Standard MIL-STD-810 C/D/E/F/G

### Standard scope of delivery

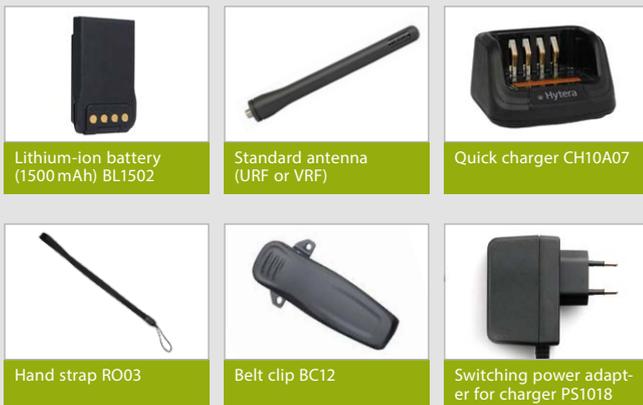

### Additional accessories (selection)

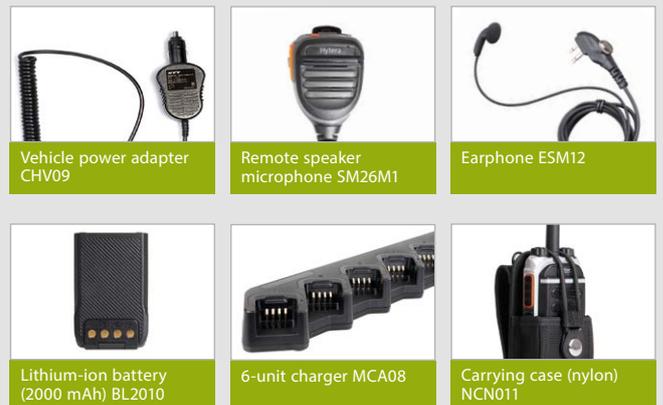

## Technical Data

General data	
Frequency range	VHF: 136 – 174 MHz UHF: 400 - 470 MHz
Supported operating modes	<ul style="list-style-type: none"> <li>DMR Tier II in acc. with ETSI TS 102 361-1/2/3</li> <li>Simulcast</li> <li>XPT Digital Trunking</li> <li>Analog</li> </ul>
Channel capacity	256 (PD505) / 512 (PD565)
Number of zones	16 (PD505) / 32 (PD565)
Channel spacing	12.5 / 20 / 25 kHz (analog) 12.5 kHz (digital)
Operating voltage	7.4V (nominal)
Standard battery	1500 mAh (lithium-ion battery)
Battery service life (5-5-90 duty cycle, high transmitting power, standard battery)	approx. 11 h (analog) approx. 16 h (digital) with 1500 mAh approx. 20 h (digital) with 2000 mAh
Frequency stability	± 0.5 ppm
Antenna impedance	50 Ω
Dimensions (H × B × T) (without antenna)	115 × 54 × 27 mm (PD505) 115 × 54 × 27 mm (PD565)
Weight	approx. 260 g (PD505) approx. 280 g (PD565)
Programmable keys	1 (PD505) 6 (PD565)
LCD display (PD565)	monochrome LCD display, 3 lines

Environmental conditions	
Operating temperature range	- 30 °C to + 60 °C
Storage temperature range	- 40 °C to + 85 °C
ESD	IEC 61000-4-2 (Level 4), ± 8 kV (contact), ± 15 kV (air)
Protection against dust and moisture	IP54
Shock and vibration resistance	MIL-STD-810 C/D/E/F/G
Relative humidity	MIL-STD-810 C/D/E/F/G

Transmitter	
Transmitting power	VHF: 1 / 5 W URF: 1 / 4 W
Modulation	11 K0F3E at 12.5 kHz 14 K0F3E at 20 kHz 16 K0F3E at 25 kHz
4FSK digital modulation	12.5 kHz (data only): 7K60FXD 12.5 kHz (data and voice): 7K60FXW
Interfering signals and harmonics	- 36 dBm (< 1 GHz) - 30 dBm (> 1 GHz)
Modulation limiting	± 2.5 kHz at 12.5 kHz ± 4.0 kHz at 20 kHz ± 5.0 kHz at 25 kHz
Hum and noise	40 dB at 12.5 kHz 43 dB at 20 kHz 45 dB at 25 kHz
Adjacent channel selectivity	60 dB at 12.5 kHz 70 dB at 20/25 kHz
Audio sensitivity	+ 1 dB at - 3 dB
Audio distortion	≤ 3 %
Digital vocoder type	AMBE+2™

Receiver	
Sensitivity (analog)	0.22 µV (12 dB SINAD) 0.22 µV (typical) (12 dB SINAD) 0.4 µV (20 dB SINAD)
Sensitivity (digital)	0.22 µV / BER 5 %
<b>Adjacent channel selectivity</b> TIA-603 ETSI	60 dB at 12.5 kHz / 70 dB at 20 / 25 kHz 60 dB at 12.5 kHz / 70 dB at 20 / 25 kHz
<b>Intermodulation</b> TIA-603 ETSI	70 dB at 12.5 / 20 / 25 kHz 65 dB at 12.5 / 20 / 25 kHz
<b>Spurious response rejection</b> TIA-603 ETSI	70 dB at 12.5 / 20 / 25 kHz 70 dB at 12.5 / 20 / 25 kHz
Signal-noise ratio (S/N)	40 dB at 12.5 kHz 43 dB at 20 kHz 45 dB at 25 kHz
Audio power output	0.5 W
Audio distortion	≤ 3 %
Audio sensitivity	+ 1 dB at - 3 dB
Conducted spurious emission	< - 57 dBm

All technical information was determined at the factory and in accordance with the corresponding standards. Subject to change on the basis of continuous development.

Your Hytera partner:



### Hytera Mobilfunk GmbH

**Address:** Fritz-Hahne-Straße 7, 31848 Bad Münder, Germany  
**Tel.:** + 49 (0)5042 / 998-0 **Fax:** + 49 (0)5042 / 998-105  
**E-mail:** info@hytera.de | [www.hytera-mobilfunk.com](http://www.hytera-mobilfunk.com)

Further information can be found at:

[www.hytera-mobilfunk.com](http://www.hytera-mobilfunk.com)

Contact us if you are interested in sales, distribution or application partnership: ✉ [info@hytera.de](mailto:info@hytera.de)



SGS Certificate DE11/81829313

Hytera Mobilfunk GmbH reserves the right to modify the product design and the specifications. In case of a printing error, Hytera Mobilfunk GmbH does not accept any liability. All specifications are subject to change without notice.

Encryption features are optional and have to be configured separately; they are also subject to German and European export regulations.

**HYT** Hytera are registered trademarks of Hytera Co. Ltd. ACCESSNET® and all derivatives are protected trademarks of Hytera Mobilfunk GmbH. © 2016 Hytera Mobilfunk GmbH. All rights reserved.